


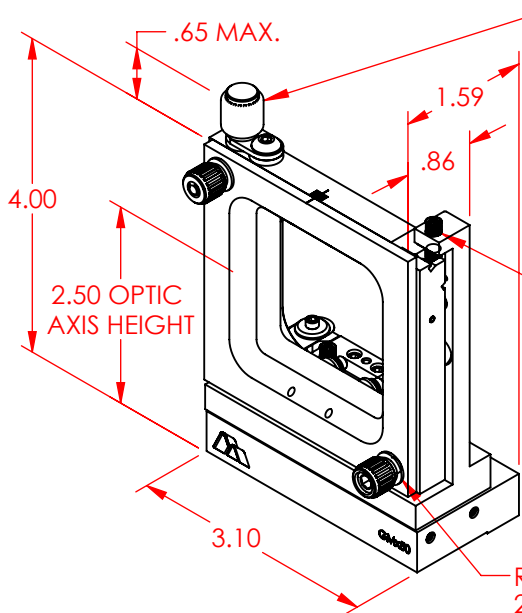


ROLL ADJUSTMENT SCREW WITH SOFT TOUCH KNOB CAP PROVIDES  $6^\circ$  TRAVEL AND 6 arc-sec MINIMUM CONTROLLABLE MOTION.

PITCH ADJUSTMENT SCREW PROVIDES  $6^\circ$  TRAVEL AND 3.7 arc-sec MINIMUM CONTROLLABLE MOTION.

2-56 SCREW TO RETAIN OPTIC, FITS 5/64 OR 2.0mm HEX. 4 PLACES.

ROLL LOCK KNOBS, 2 PLACES

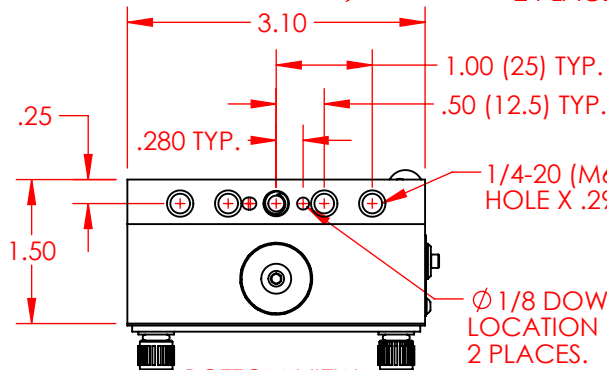

1/4-20 (M6) THREADED HOLE X .29 DEEP, 4 PLACES.

$\varnothing$  1/8 DOWEL PIN LOCATION HOLE, 2 PLACES.

BOTTOM VIEW OF BASE

DIMENSIONS SHOWN IN PARENTHESES REFLECT METRIC ASSEMBLY FEATURES

