


M3 X .16 DEEP THREADED HOLE. 4 PLACES EQUALLY SPACED ON A $\varnothing$.970 BOLT CIRCLE, BOTH SIDES.

ADJUSTMENT PRE-TENSIONING SCREW FITS 5/64 OR 2.0mm HEX, RECOMMENDED TORQUE 28 oz-in (.20 N-m), 2 PLACES.


8-100 ADJUSTMENT SCREW FITS 5/64 OR 2.0mm HEX, 2 PLACES.

M4 THREADED HOLE OR CLEARANCE FOR M3 CAP SCREW, 2 PLACES.

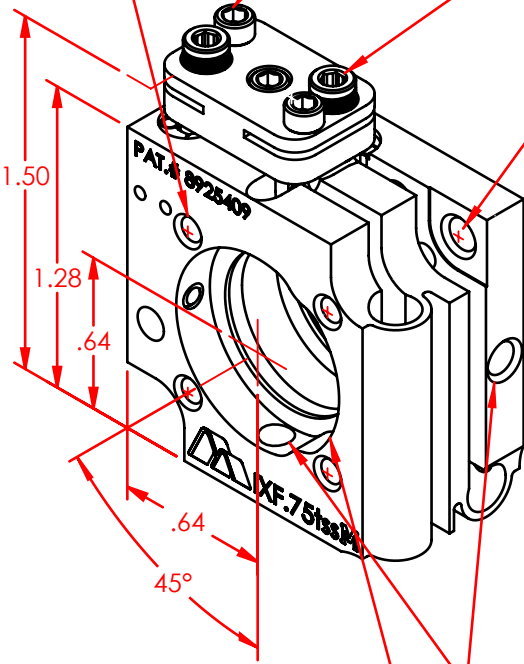

$\varnothing$.650 THROUGH CLEARANCE FOR $\varnothing$.75 OPTIC. OPTIC SEAT .165 DEEP, BOTH SIDES.

M4 THREADED MOUNTING HOLE.

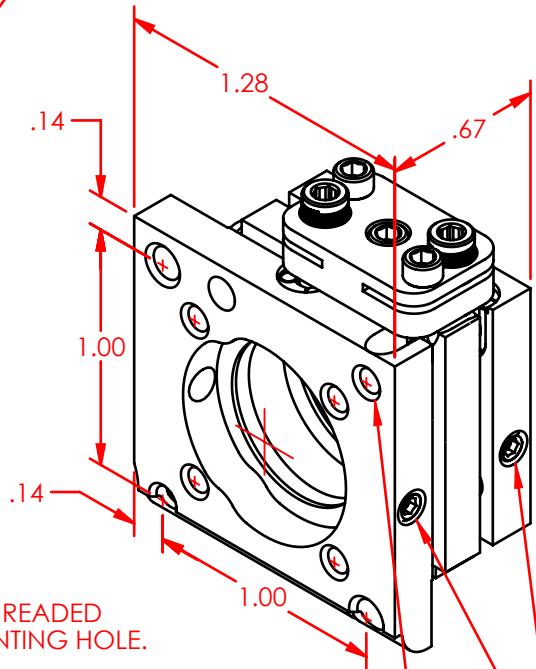

M3 X .18 DEEP THREADED HOLE, 2 PLACES.

M3 SET SCREW FOR HOLDING OPTIC, FITS 1.5mm HEX.